

Product Data

Syntilo 81 BF

Synthetic coolant

Description

Castrol Syntilo[™] 81 BF is a synthetic coolant which has been developed for use as a general purpose grinding fluid for ferrous metals. It forms a clear, stable solution in both hard and soft waters. Syntilo 81 BF exhibits very good anti-corrosion properties coupled with a high resistance to bacterial attack.

Application

Syntilo 81 BF is developed for surface, cylindrical, double disk and centreless grinding

Advantages

- Low foaming in all water conditions to ensure continuous grinding performance
- · Inhibits microbial growth to extend fluid life in central systems and individual sumps
- Rejects tramp oil to the surface of the fluid for easy removal
- Boron, chlorine, phenol and nitrite free for environmental compliance
- Maintains corrosion protection in hard water
- · Settles chips quickly to prevent grinding wheel build-up and maintain a clean working environment


Typical Physical Characteristics

Test Method	Unit	Value
Visual	Visual	Transparent, yellow
DIN 51757 ASTM D 1298	Kg/m³	1.110 – 1.130
Calculated	lbs/gal	9,38
Calculated	Vol. %	0
Visual	Visual	Transparent
DIN 51361 ASTM E70-97		8.9-9.5
	Visual DIN 51757 ASTM D 1298 Calculated Calculated Visual DIN 51361	Visual Visual DIN 51757 ASTM D 1298 Calculated Ibs/gal Calculated Vol. % Visual DIN 51361

Recommended Concentrations

Grinding: 3-5%

Additional Information

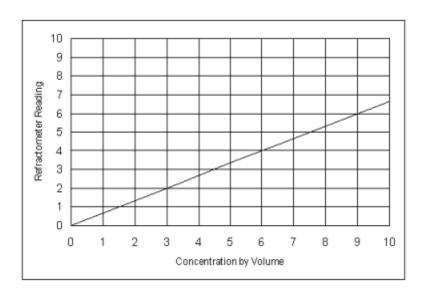

Syntilo 81 BF 08 Sep 2016

Castrol, the Castrol logo and related marks are trademarks of Castrol Limited, used under licence.

This data sheet and the information it contains is believed to be accurate as of the date of printing. However, no warranty or representation, express or implied, is made as to its accuracy or completeness. Data provided is based on standard tests under laboratory conditions and is given as a guide only. Users are advised to ensure that they refer to the latest version of this data sheet. It is the responsibility of the user to evaluate and use products safely, to assess suitability for the intended application and to comply with all applicable laws and regulations. Material Safety Data Sheets are available for all our products and should be consulted for appropriate information regarding storage, safe handling, and disposal of the product. No responsibility is taken by either BP plc or its subsidiaries for any damage or injury resulting from abnormal use of the material, from any failure to adhere to recommendations, or from hazards inherent in the nature of the material. All products, services and information supplied are provided under our standard conditions of sale. You should consult our local representative if you require any further information.

Castrol (UK) Limited, PO BOX 352, Chertsey Road, Sunbury On Thames, Middlesex, TW16 9AW Orders/Enquiries: 0345 9645111 Technical Enquiries: 0345 082 1719 www.castrol.com/industrial